


1.

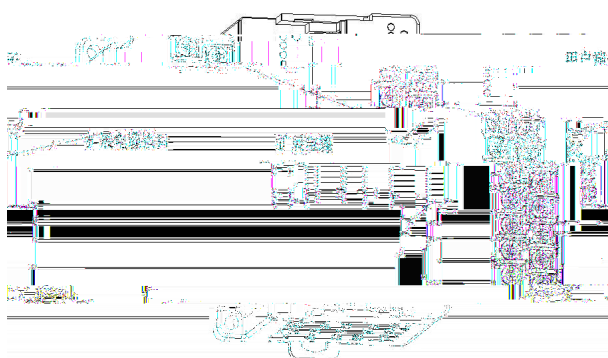


1-1


2.

2.1

DIN

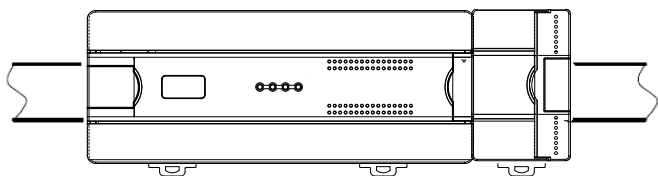

2.4

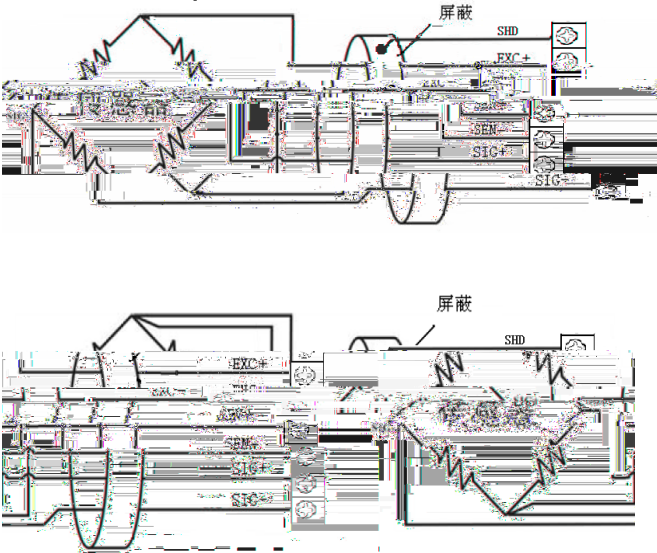

4-1 MC100-2WT

24V+	24V	24V-	24V
●		⊕	
EXC1+	1	●	
EXC1-	1	SIG1+	1
SEN1+	1	SIG1-	1
SEN1-	1	SHD1	1
EXC2+	2	●	
EXC2-	2	SIG2+	2
SEN2+	2	SIG2-	2
SEN2-	2	SHD2	2

3.

3.1

3.1

3-1

	Ω
	Ω
	/℃

4.

4.1

6.

[illegible]

MC100-2W

模块识别码 模块版本

模块状态

输入通道_1

通道状态 重量值

清零范围 % 满量程

(1%~99%) (1~32767)

重量分度值 d 滤波等级

(1~10) (0~5)

追零范围 d 追零时间 s

(0~3000) (1~10)

判稳范围 d 判稳时间 百毫秒

(1~1000) (1~100)

指令发送 AD值(双字)

确定 取消

说明：前面有“D”标记的表示该项对应主模块 D 寄存器地址。

6-2

/*X4输入有效时，通道2重量清零*/			
X4		[MOV 1 D303]	
/*X5输入有效时，通道2重量去皮*/			
X5		[MOV 2 D303]	
/*X6输入有效时，通道2重量零点校准*/			
X6		[MOV 3 D303]	
/*X7输入有效时，通道2重量线性校准10000克*/			
X7		[MOV 10000 D303]	
/*当模块通道2指令完成标志位为1时，发送0指令清除指令完成标志*/			
H	BLD	D102	13
	[	MOV	0 D303

7.

☐ ☐ ☐ ☐