


|


□

□

□

□



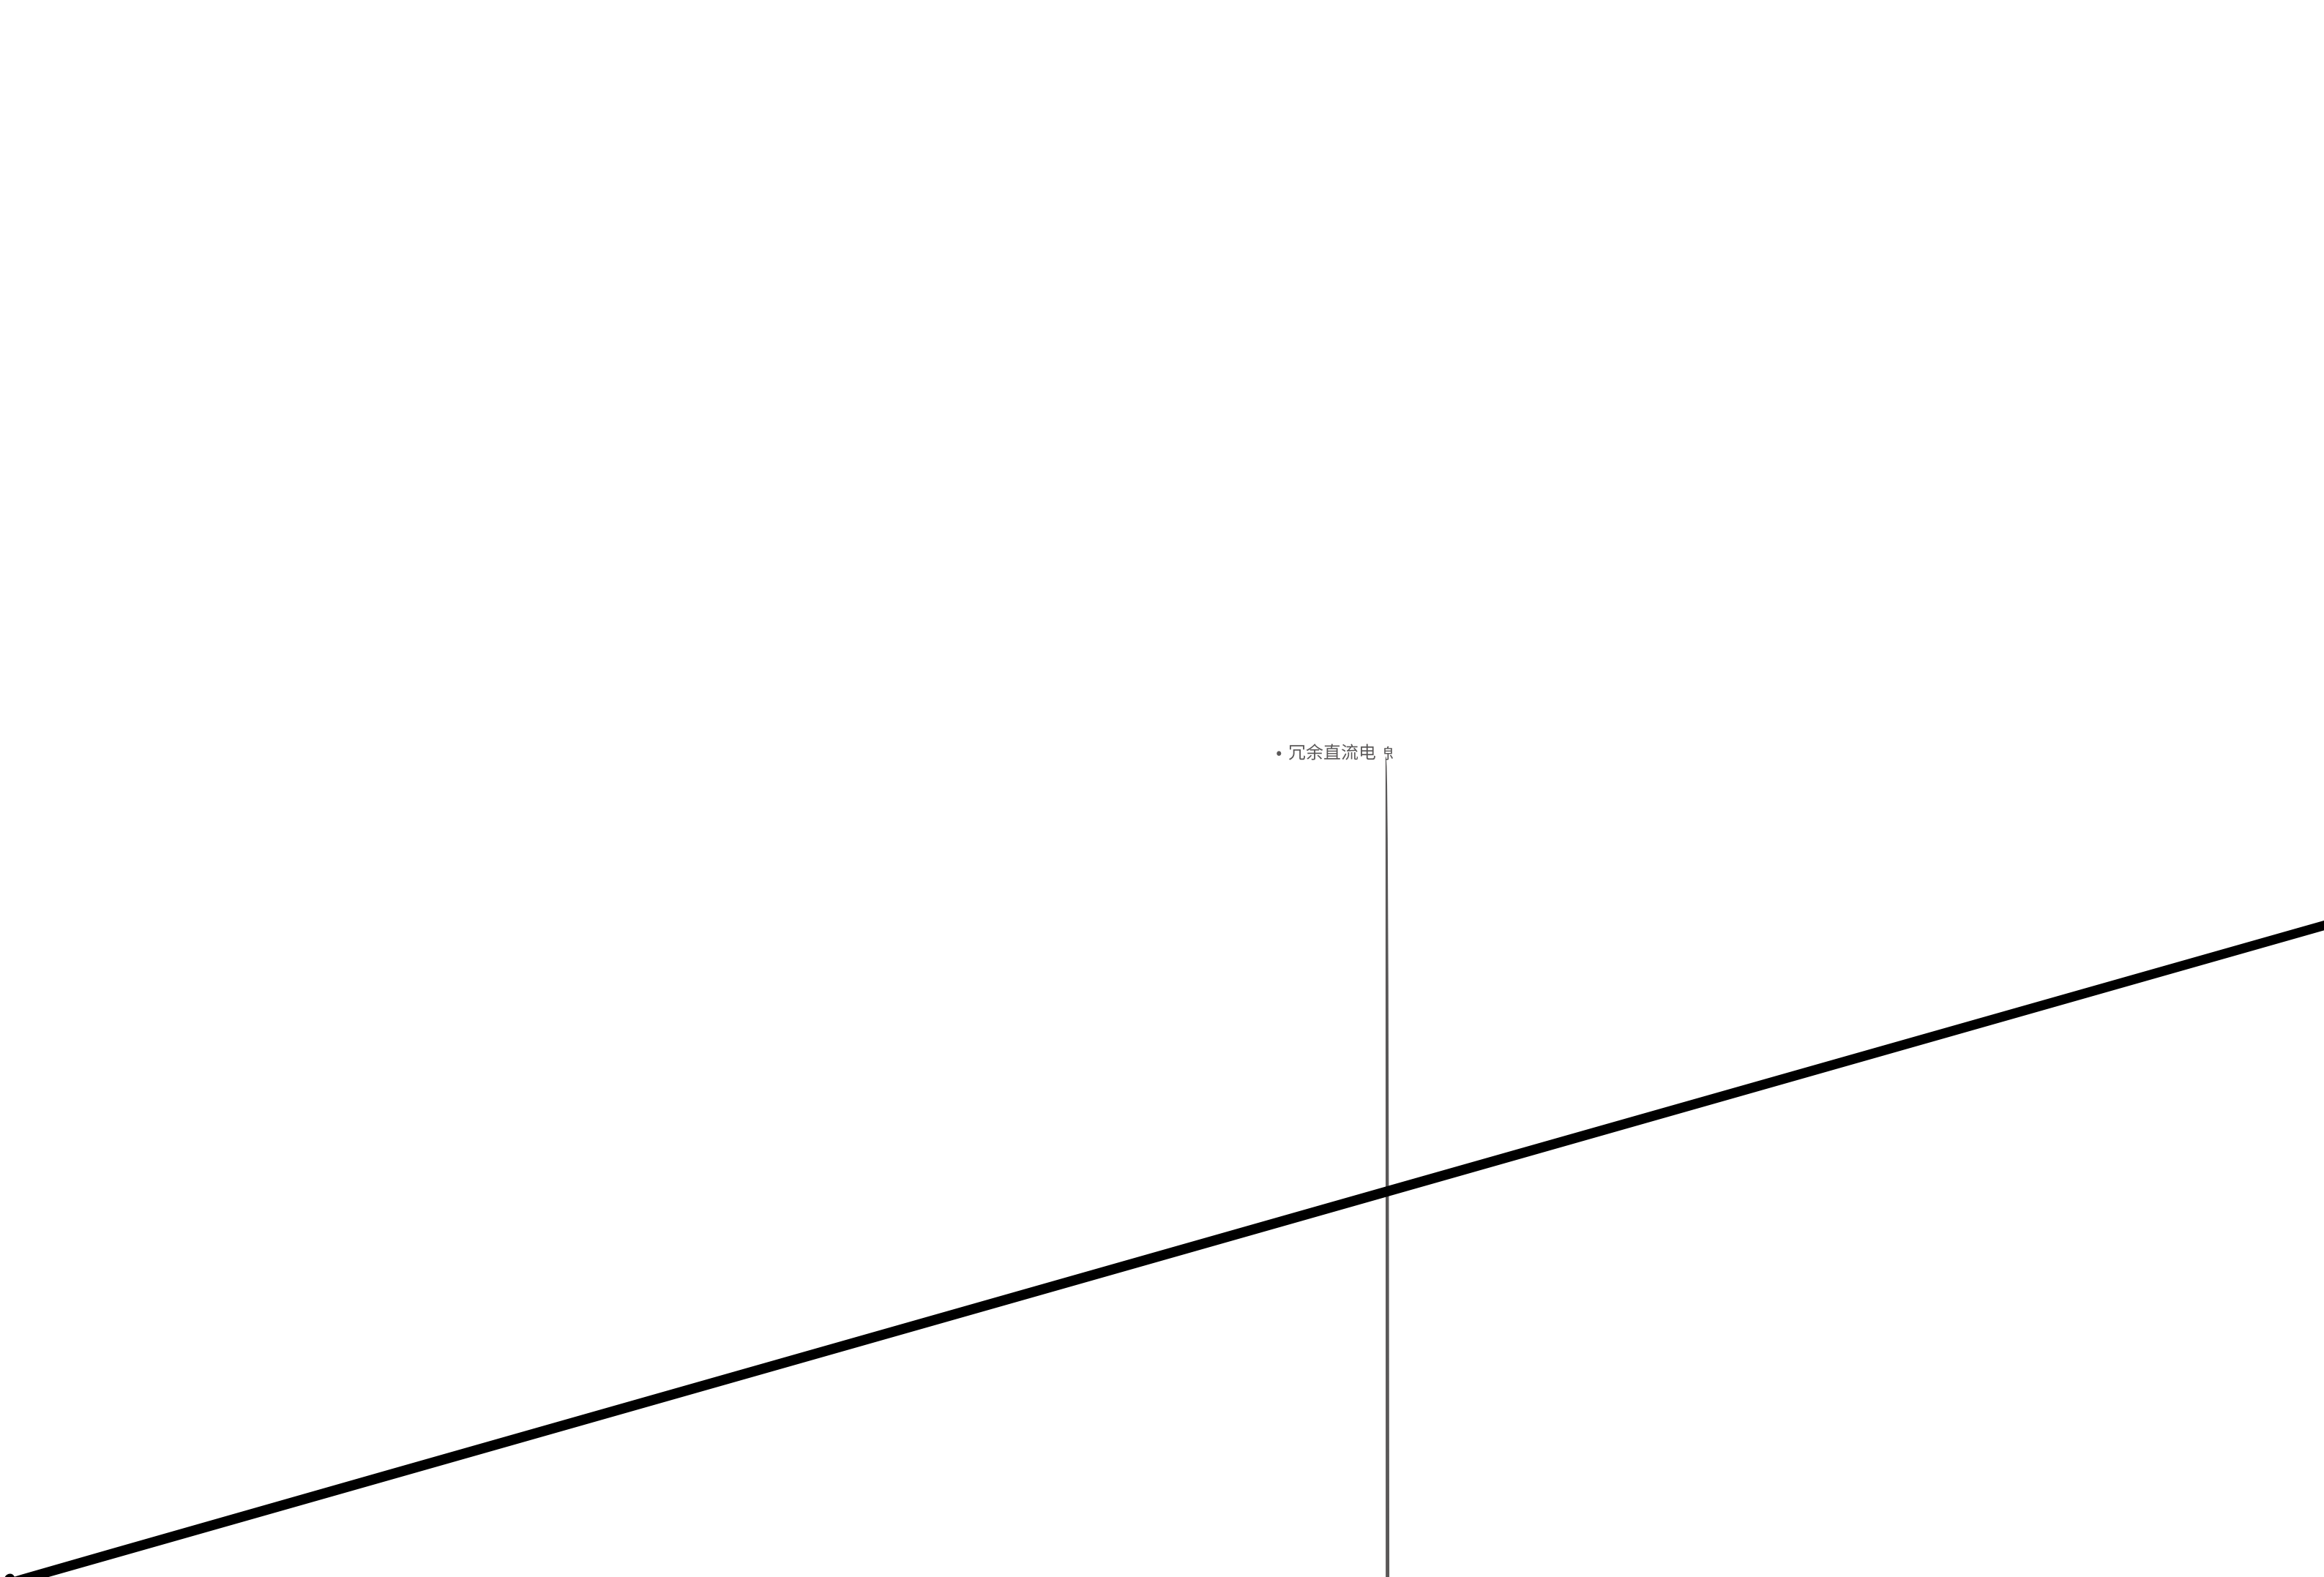

配置

敬请期待



输出电流@额定		总调整率(含设定		峰值电流@1S
MAP80H-12	12V	6.66A	±5%	10.0A
MAP80H-15	15V	5.33A	±5%	8.0A
MAP80H-19	19V	4.21A	±5%	7.9A
MAP80H-24	24V	3.33A	±5%	7.5A

* 高峰值功率版本

输出电流				
MDP120-19y	19V	6.3A	190mV	±5%
MDP120-24y	24V	5.0A	240mV	±5%

90H系列

尺寸：4.13×2.2×1.12"



* 高峰值功率版本

O90H系列

尺寸：4.13×2.2×1.12"



		8.33A
		6.66A
		5.20A
		4.16A

	输出电流	峰值电流@10S	峰值电流@40mS	总
12V		25.00A	35.0A	±5%
15V		22.00A	30.0A	±5%
19V		18.50A	25.0A	±5%
24V	00A	15.00A	20.0A	±5%
28V	8.57A	12.85A	17.5A	±5%
32V	7.50A	11.25A	15.0A	±5%
36V	6.66A	10.00A	13.3A	±5%
48V	5.00A	7.50A	10.0A	±5%

符合EN55011 / FCC Part 15 Class B Emissions

- 3年质保



1.5A

1.6A

1.6A

1.41A

1.33A

1.61A

2.71A

总调整率(含设定点)

产品型号

输出电压

出电流

纹波及噪声(最大值)

尺寸: 3x5x12mm		
18.33A	25.00A	25.00V
15.00A	22.00A	22.00V
13.15A		
10.41A		
8.92A		
7.81A		
6.94A		
5.20A		

*	
---	--

30.0A	
26.6A	150mV
22.2A	180mV
16.67A	240mV
	280mV
	300mV

Custo

